



- **IP video phone**
- **Robust housing, constructed of stainless steel 316**
- **Vandal resistant handset and armored cord**
- **Large screen with tampered glass**
- **Full rugged & durable keypad**
- **Wall mounting, simple installation**
- **DC powered**
- **Inductive coupler fitted as standard for hard of hearing**
- **CE, FCC, RoHS, ISO9001 compliant**

The Handset Video telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums etc.

Housed in stainless steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

PC

10.1" 1280*800 IPS capacitive screen.
Win10 OS.
Intel N4000 CPU.
4G DDR and 64GB Flash.
Front 2.0MP camera.
With external DC charging port.
With micro USB port, support USB cable to transfer to RJ45.
Without lithium battery built in.

SIP-VoIP TECHNICAL SPECIFICATIONS

Power Input:

12-24V DC or PoE

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711, G.723.1, G.729A/B, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- IEEE802.3af PoE
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control features: Flexible dial map, support hot-line

Network Features

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config

TECHNICAL SPECIFICATIONS
Casing Material

Robust 316 stainless steel body (or cold-rolled steel body)

Colors

Grey, Blue, or optional

Handset Material

ABS material handset with stainless steel spiral cord.

Keypad

Weather sealed tactile digital keypad.

Chrome key and frame made of zinc alloy.
Vandal resistance.

Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C

Weather Resistance

IP55-IP65

Ringing Tone

Shrill warble tone 90 dBA @ 1 metre
typical

Hook switch

Electronic / magnetic with no visible
moving parts

M.T.B.F.

Calculated to have an M.T.B.F. in excess
of 50,000 hours using

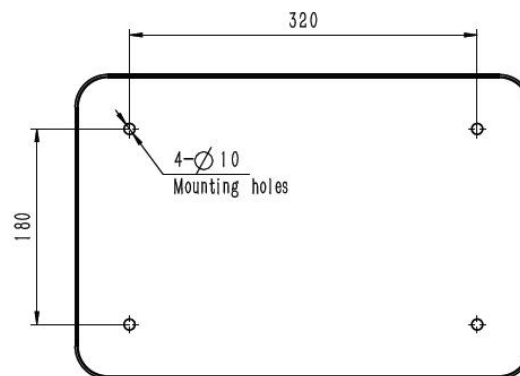
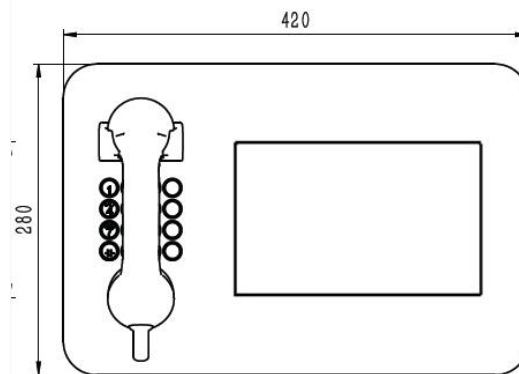
PACKAGE

Unit size: 420 *280 *52 (mm)

Carton size: 500*320 *70 (mm)

Packaging materials: pearl cotton, carton

Net weight: 4 KG Gross weight: 4.5KG


Dimension

APPROVALS


This mark indicates compliance with the:

Radio & Telecommunications Terminal Equipment
Directive 2004/108/EC



This mark indicates compliance with the:

FCC Part 15 Subpart B Class B



J&R
TECHNOLOGY

JR213-FK-SIP
Handset Telephone



J&R TECHNOLOGY LIMITED

Tel: +86 0755 27322952 Fax: +86 0755 27322197

Email: sales@jr-ltd.com Web: www.jrtele.com

Add: F/3, Build#1, BWN Industrial Park, Fuyong, Bao'an District, Shenzhen, China